


Job:
 Type:
 Notes:

Cylinders

The Philips Gardco 300 Line is a series of compact, high performance cylinder luminaires in a variety of styles. The Emergency style utilizes a 42w compact fluorescent lamp. Housings are die cast aluminum with twin architectural reveals located near the luminaire apertures. A choice of two (2) models, each with two (2) light control styles is available in a wall mounted configuration. Luminaires are finished with a fade and abrasion resistant polyester powder coat offered in five standard colors. 300 Line Emergency luminaires in the normal downlight position provide full cutoff performance.



PREFIX	MODEL	MOUNTING	TRIMS	LAMP	VOLTAGE	FINISH	OPTIONS

Enter the order code into the appropriate box above. Note: Philips Gardco reserves the right to refuse a configuration. Not all combinations and configurations are valid. Refer to notes below for exclusions and limitations. For questions or concerns, please consult the factory.

PREFIX	MODEL	MOUNTING	TRIMS
300EM Emergency Cylinder	D Enclosed Downlight	W Wall	<u>Enclosed Downlight "D" only</u> L Solite Lens LL Solite Lens with Louver
300EMR Remote Emergency Cylinder	O Open Downlight		<u>Open Downlight "O" only</u> R Reflector

Luminaires cannot be field modified to change optics or lamp types.

LAMP	VOLTAGE	FINISH	OPTIONS
32TRF	120	BRP Bronze Paint	PCB Button Type Photocontrol
42TRF	277	BLP Black Paint	WS Wall Mounted Box for Surface Conduit
		WP White Paint	<u>EMR Luminaires Only:</u>
		NP Natural Aluminum Paint	B84CG Bodine Emergency Battery Pack
		BGP Beige Paint	<i>Emergency Battery Packs for EMR types must be ordered with luminaires and supplied by Philips Gardco.</i>
		VP Verde Green Paint	
		OC Optional Color Paint <i>Specify RAL designation ex: OC-RAL7024.</i>	
		SC Special Color Paint <i>Specify. Must supply color chip.</i>	

SPECIFICATIONS

HOUSING: Housings are die cast aluminum in a single-piece cylindrical form of corrosion resistant alloy, 1/8" min. wall thickness. Units are 7.5" in diameter and 12" in height, nominal measurements.

MOUNTING:

Wall Bracket (W): Cast aluminum canopy with integrated aluminum arm secured to housing with (2) 5/16" bolts. Requires mounting to a structural member of the building.

LIGHT CONTROL (Trim):

Lens (L): Lens units consist of a Solite® glass lens mounted to a die cast aluminum trim assembly. Type D (Enclosed Downlight) only.

Lens with Louver (LL): Lens with louver units consist of a Solite® glass lens mounted to a die cast aluminum trim assembly, including 1 5/8" x 1 5/8" square louvers with a nominal depth of 1". Type D (Enclosed Downlight) only.

Reflector (R): Reflectors are composed of spun components, electro-polished, anodized, sealed and feature a dual stage construction. Type O (Open Downlight) only.

ELECTRICAL: Standard fluorescent units have a starting temperature of 0°F/-18°C. Standard fluorescent ballasts are high power factor electronic solid state. Fluorescent sockets are high temperature (PBT) with brass contacts.

EM Luminaires: In the event of power interruption, integral battery pack will power (1) 42W or (1) 32W compact fluorescent lamp at reduced light levels for a minimum of 90 minutes. Maintenance free battery is rated for ambient temperatures down to 32°F/0°C (EM). Indicator light is visible through the lens. A test switch is accessible through the door assembly. EM units do not bear CUL label.

EMR Luminaires: A 7.5'/2.29m, 12 wire, quick disconnect assembly is provided for wiring through conduit (by others) to a Bodine B84CG fluorescent emergency battery pack. The fluorescent emergency battery pack MUST be supplied by Gardco. The B84CG option is required to be on the order to the factory. In the event of power interruption, the remote battery pack (B84CG) will power (1) 42W or (1) 32W compact fluorescent lamp at reduced light levels; for a minimum of 90 minutes.


Maintenance free battery is rated for ambient temperatures down to 32°F/0°C. Minimum luminaire starting temperature is 0°F/-18°C. Indicator light is visible through the lens. A test switch is accessible through the door assembly. NOTE: B84CG does not bear CUL label.

FINISH: Each luminaire receives a fade and abrasion resistant, electrostatically applied, thermally cured, textured TGIC polyester powdercoat finish.

LABELS: All luminaires bear UL or CUL (where applicable) Wet Location labels, except as noted.

WARRANTY: Philips Gardco luminaires feature a 5 year limited warranty. See Warranty Information on www.sitelighting.com for complete details and exclusions. Polycarbonate lenses carry a 1 year warranty only.

DIMENSIONS

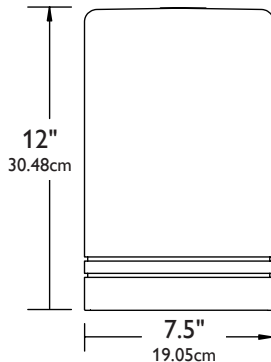

EM - Emergency Cylinder

EMR - Remote Emergency Cylinder

